



TECHNICAL INFORMATION

Watts:	15
Lumens:	1600
Unit Color:	Black
Body Type:	ABS + PC
LED Chip Type:	SMD
Operation Temperature:	-25°C to +50°C
Dimmable:	No
Beam Angle:	140°
Color Temperature:	4000K
Dimension:	413x232x58mm
Detection Distance:	3-8m
Detection Angle:	120
Battery Type:	7.4V Lithium Battery, 10800mAh
Charging Time:	6-7 Hours
Working Time:	2-36 Hours
No. Of Led:	40
ULR Percentage:	0.3



FEATURES

- Uses Solar Panel for efficient photovoltaic conversion and lengthy lifespan
- Auto On/Off Lights - PIR Sensor
- Easy Installation - No Wiring
- Dust-Heat-Waterproof-UV Protected ABS plastic body which ensures the durability
- Zero electricity cost - Solar Powered
- Suitable for Pathways, Garden, Patio and similar outdoor environment

CE/LVD CE/EMC




SOLAR STREETLIGHTS | LED LIGHTING

V-TAC's LED Lighting range includes lighting that fulfills the needs of various end-users and industries, offering efficient and innovative products that provide modern solutions at an affordable price. We are proud to also provide an extended multi-year warranty on our products, as well as detailed support.

One brand, endless solutions..

SKU: 8549 - 1281 938

[View more details](#)

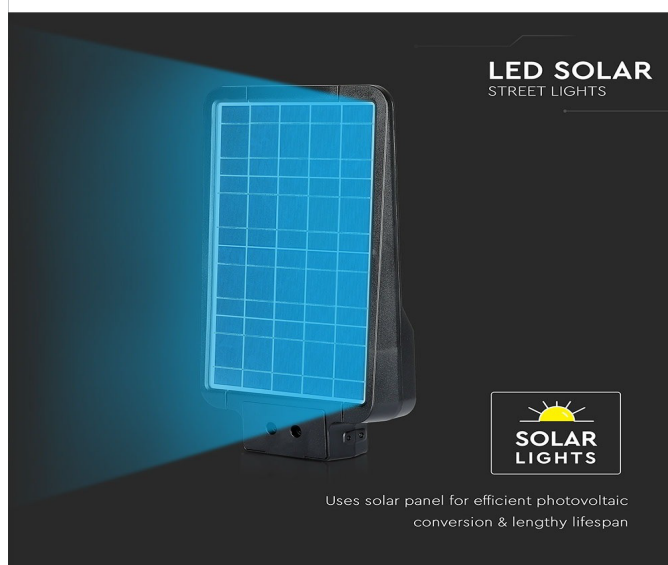

PACKAGING

Gross Weight (Kgs):	2.485
Unit CBM:	0.008008
Dimension:	413x232x58mm

MASTER BOX PACKAGING

Box Qty:	10
Qty Per Pallet:	160
Length (Box) mm:	70
Width (Box) mm:	260
Height (Box) mm:	440

LISTING DETAILS

Commodity Code:	9405411000
Ean Code:	3800157639217